

SPIRON- M AISI 316L Electrical Heater

General Features:

- Easy to install with built in contactors
- Safe
- Reliable
- Silent Operation
- AISI 316L stainless steel heating element
- Built in flow switch allows safe operation as low as 1,000 liters per hour
- Floor or wall mountable
- Control thermostat and safety thermal cut-out with manual reset
- Extra thermal protection on flow tube.



Gemas Electrical Heaters provides efficiency, safety, and above all reliability to effortlessly heat your pool to the desired temperature.

The heater can be mounted to wall or floor and can easily be controlled.

Heat Requirement Chart:

Pool Dimensions (m)	Open Pools $\Delta t=10\text{ }^{\circ}\text{C}$	Indoor Pools $\Delta t=17\text{ }^{\circ}\text{C}$
	48 Hours	48 Hours
	Required Heating (kW)	Required Heating (kW)
4,00x8,00x1,50	22,39	17,46
5,00x10,00x1,50	30,08	27,29
6,00x12,00x1,50	43,32	39,29
8,00x16,00x1,50	77,01	69,85
12,50x25,00x1,50	188,05	170,61
12,50x25,00x1,80	204,90	199,25
16,00x35,00x1,50	336,91	305,60
20,00x40,00x1,50	481,29	436,57
25,00x50,00x1,50	752,02	682,14
25,00x50,00x2,00	864,02	89,94



SPIRON- M AISI 316L Electrical Heater

Technical Features:

Power Supply	3 phases
Flow Requirement	Minimum Flow: 3-kW to 6-kW = 1m ³ /hour 9-kW to 24-kW = 4m ³ /hour Maximum Flow: 17m ³ /hour
Heating Elements	AISI 316L Stainless Steel
Control Thermostat	0°C ~ 40°C (1.0°C Differential)
Safety Thermal cut-out	55°C (Manual reset)
Flow Switch	Included
Wiring	High temperature, silicone sheathed, multi-strand copper conductors
Contactors	<i>Schneider Electric</i>
Seals	Special formula high temperature polymer
Water Connections	2½" / 75mm PVC unions for rigid pipe
Working Pressure	4 bar maximum
Mounting	Floor or Wall mounting
Standards compliance	European Electromagnetic Compatibility directive
Harmonized standards	The European Low Voltage Directive and The Harmonized Standard


Models:

Code	3 Phase Output	400 V Star / 230 V Delta	Amp
10113M	9 kW	400/230	13/23
10114M	12 kW	400/230	18/31
10115M	15 kW	400/230	22/38
10116M	18 kW	400/230	26/46
10117M	21 kW	400/230	30/53
10118M	24 kW	400/230	34/61



SPIRON- M AISI 316L Electrical Heater

Electricity Connection Diagram:

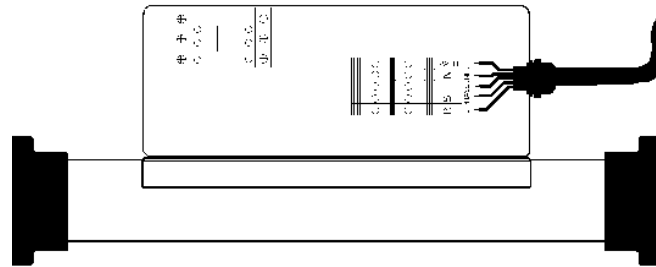

Piping Installation Diagram:

