

Fusion SL[®]

Plastic Sand Filters for Swimming Pools




Quality Management System





- Made by plastic injection technology with high quality PP material.
- The lower and upper parts are combined with a special welding technique.
- Complete with easy-to-open, threaded, transparent lid (2 cm wider than the bolted lid), side mounted multiport valve, fittings, pressure gauge and air purge.
- 2 years warranty.
- Test pressure 3,5 kg/cm²
- Maximum operation pressure 2,5 kg/cm²
- Maximum filtration rate 50 m³/h/m²

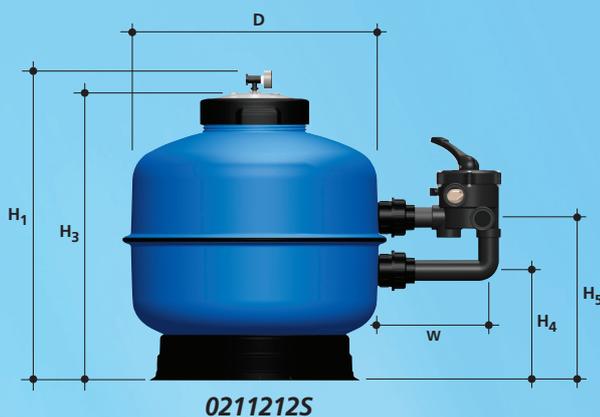

TECHNICAL CHARACTERISTICS

MODEL	0211211S	0211212S	0211211ST	0211212ST
D (mm)	500	600	500	600
H ₁ (mm)	715	760	630	660
H ₂ (mm)	-	-	-	-
H ₃ (mm)	660	705	830	860
H ₄ (mm)	260	280	-	-
H ₅ (mm)	390	410	-	-
W (mm)	260	260	-	-
CONNECTIONS Ø (mm)	1 1/2"	1 1/2"	1 1/2"	1 1/2"
FLOW (m ³ /h) (50 m ³ /h/m ²)	10	14	10	14
SAND (Kg)	75	100	75	100
NET WEIGHT (Kg)	7,000	14,000	7,000	14,000



Quality Management System



We reserve the right to change all or part of the features of the articles or contents of this document, without prior notice.

DISTRIBUTOR: